
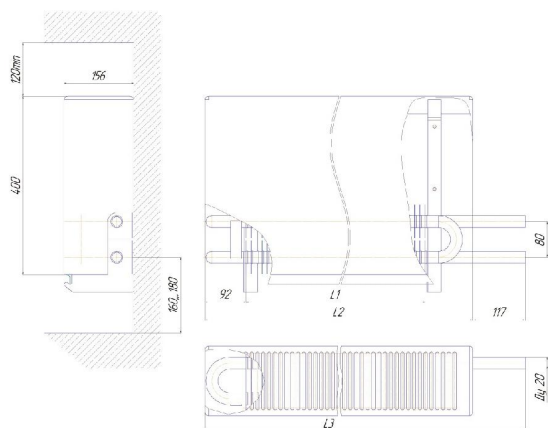


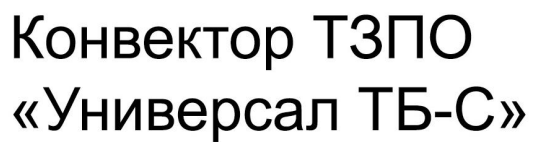

Technical drawing of a mechanical assembly, likely a pump or motor component, showing two views: a side view (top) and a front view (bottom).

Side View (Top):

- Dimensions: 50, 92, 80, 117.
- Labels: L1, L2.
- Features: A central vertical shaft with a curved, wavy profile. A horizontal shaft enters from the right, labeled 80. A vertical shaft enters from the top, labeled 117. A curved, wavy profile is shown on the left side.

Front View (Bottom):

- Label: L3.
- Features: A horizontal shaft with a series of vertical fins or blades. A curved, wavy profile is shown on the left side.

Orientation:

- The drawing is oriented vertically on the page.
- The label "G 3/4 - B" is written vertically on the right side of the front view.

Тип конвектора	Тепловой поток	Длина оребрения, L1	Длина кожуха, L2	Общая длина, L3		Масса справочная
				к	п	
	кВт	мм	мм	мм		кг
Конвектор ТЗПО «Универсал ТБ-С» (средней глубины)						
КСК-20-0,700	0,700	402	601	718	768	12,2
КСК-20-0,850	0,850	496	697	814	864	13,9
КСК-20-1,000	1,000	590	793	910	960	15,6
КСК-20-1,226	1,226	596	793	910	960	19,8
КСК-20-1,348	1,348	644	841	958	1008	21,0
КСК-20-1,471	1,471	691	889	1006	1056	22,2
КСК-20-1,593	1,593	738	937	1054	1104	23,4
КСК-20-1,716	1,716	785	985	1102	1152	24,6
КСК-20-1,838	1,838	832	1033	1150	1200	25,8
КСК-20-1,961	1,961	880	1081	1198	1248	27,0
КСК-20-2,083	2,083	933	1129	1246	1296	28,2
КСК-20-2,206	2,206	980	1177	1294	1344	29,4
КСК-20-2,328	2,328	1027	1225	1342	1392	30,6
КСК-20-2,451	2,451	1074	1273	1390	1440	31,8
КСК-20-2,574	2,574	1121	1321	1438	1448	33,0
КСК-20-2,696	2,696	1168	1369	1486	1536	34,2
КСК-20-2,819	2,819	1215	1417	1534	1584	35,4
КСК-20-2,941	2,941	1268	1465	1582	1632	36,6

1,5 МПа
1,0 МПа
120° С
5 лет
не менее 25 лет

Рис. 3. Конвектор «Универсал-ТБ-С»